




# Toshiba A1304T Camera Replacement

Written By: Christopher

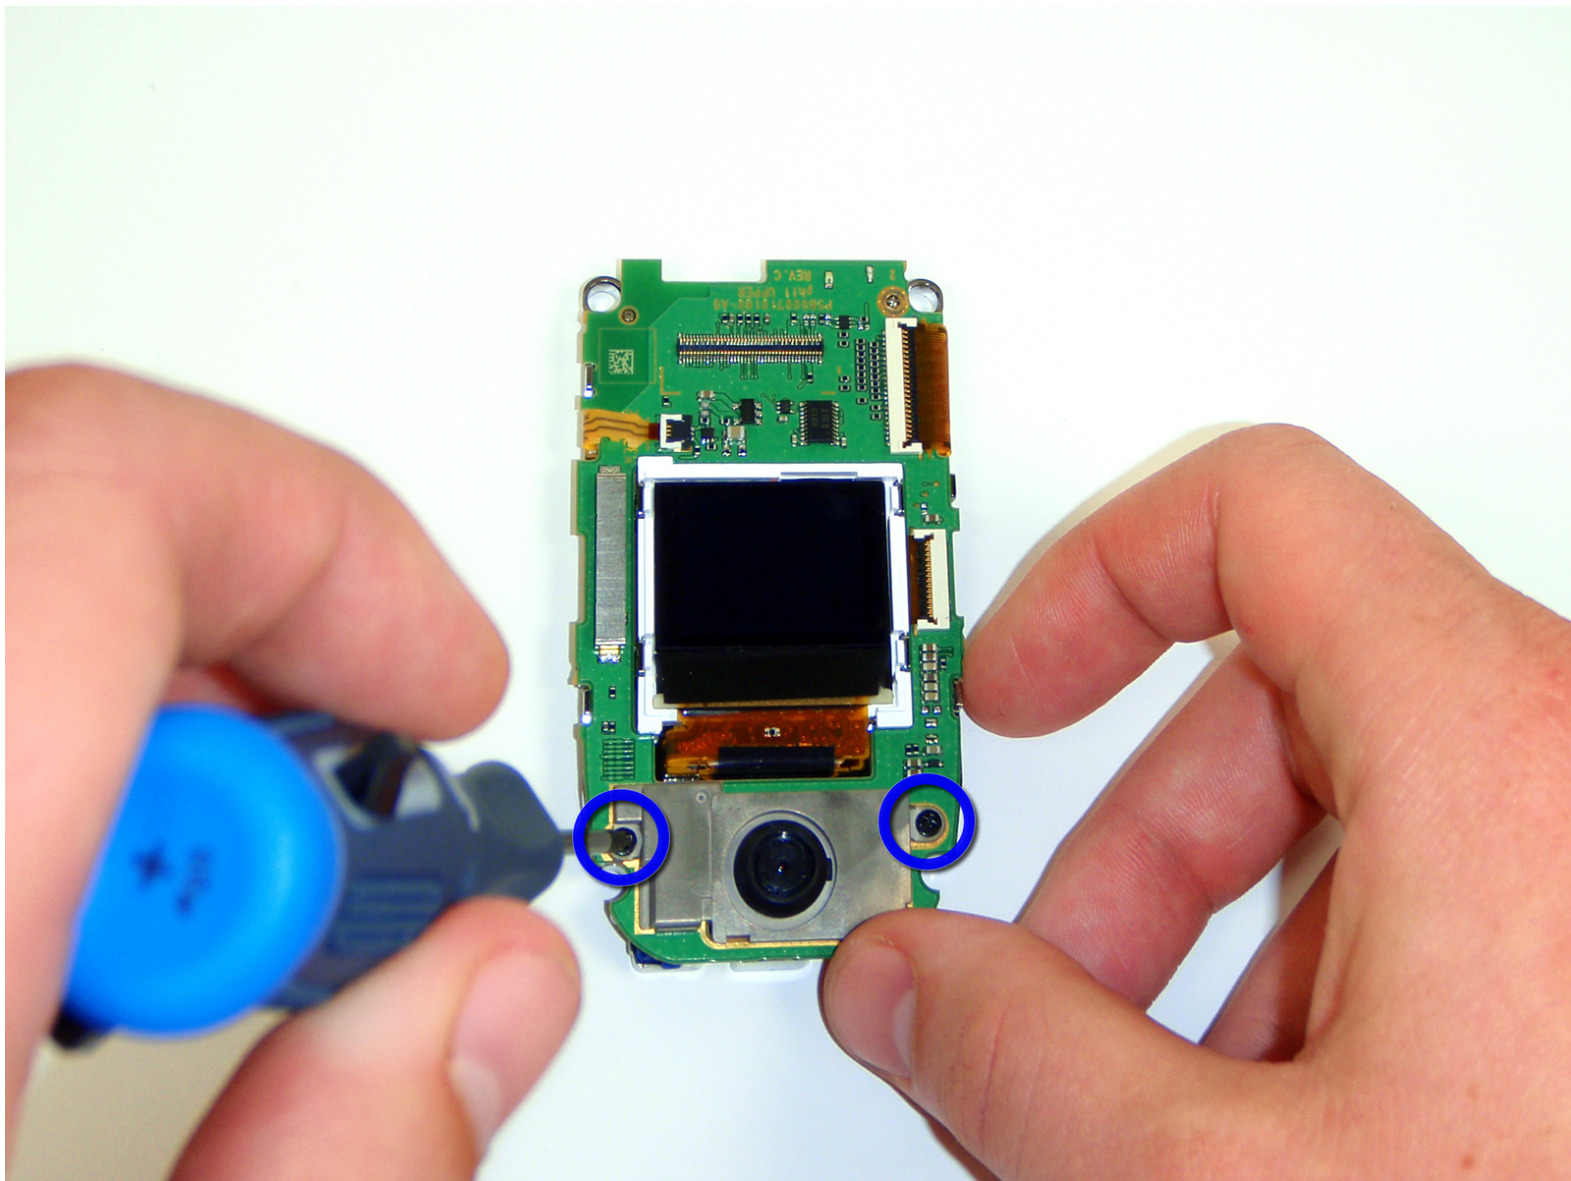

## INTRODUCTION

Use this guide to replace the Toshiba A1304T camera.



### TOOLS:

- [Flathead Screwdriver](#) (1)
- [T8 Torx Security Bit Screwdriver](#) (1)



### PARTS:

- [Toshiba A1304T replacement camera](#) (1)
-

## Step 1 — Back panel



- Using a thumb-tack, push-pin, or similar pin, remove the four plastic stoppers located on the back panel.


## Step 2



- With the T8 Torx Security Bit Screwdriver, remove the four screws in the designated locations.
- ⓘ The T8 Torx Security Bit Screwdriver can be substituted with a small flathead screwdriver. Screw removal may be slightly more difficult however.





### Step 3

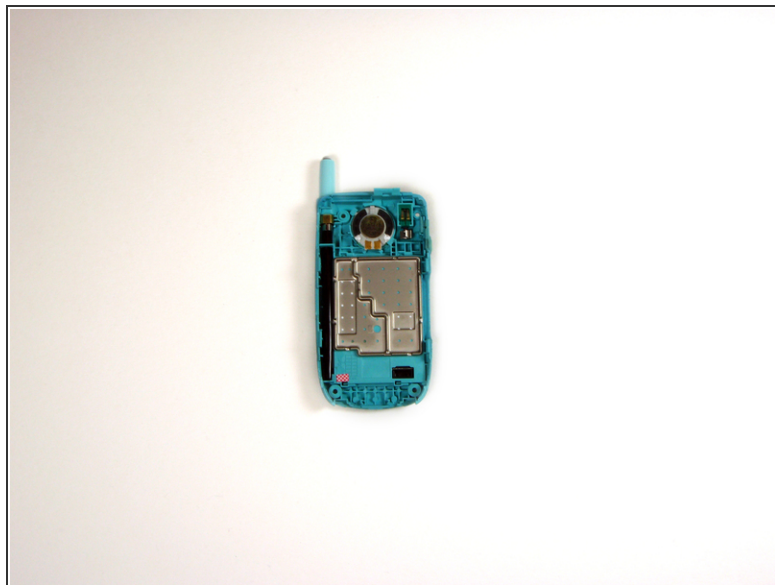


- If needed, use the flathead screwdriver to gently pry the panel from the phone.
- Using your fingers, lift the panel from the device.

### Step 4 — Camera

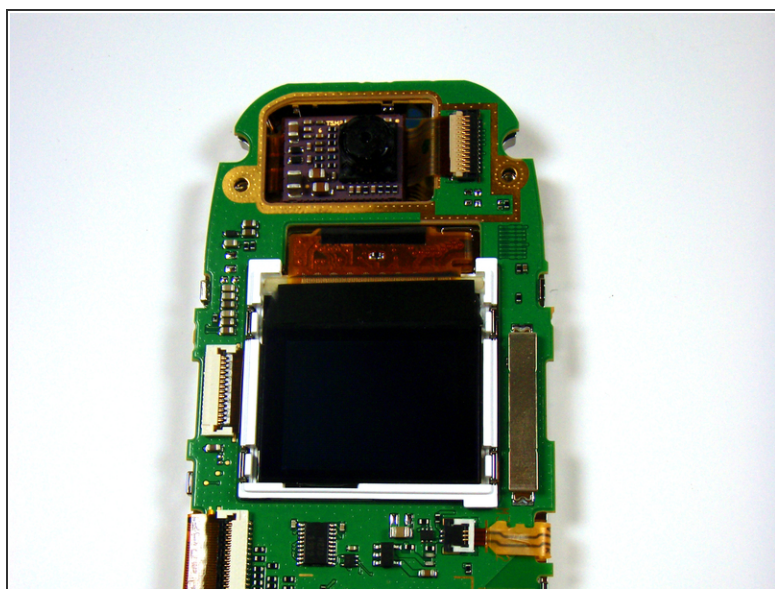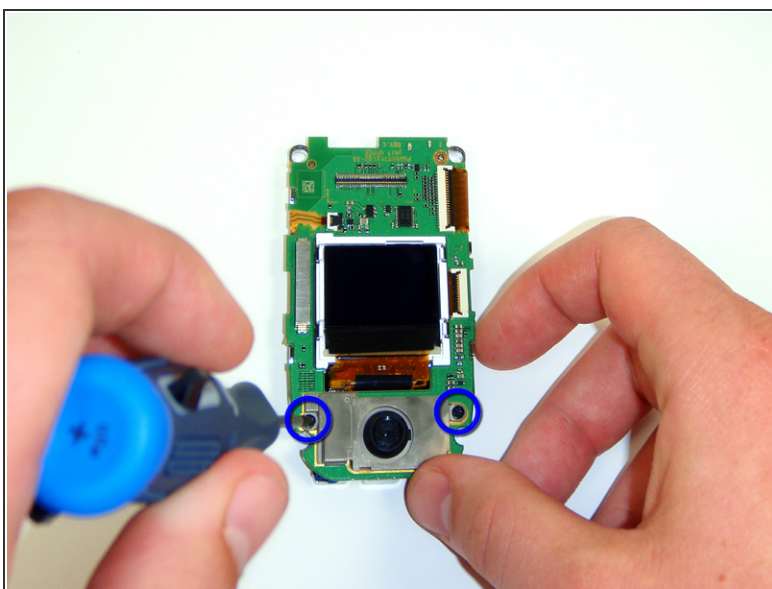

- Using a small Phillips screwdriver, remove the two black screws from the positions indicated.
- Gently pull the silver plate from the phone using your fingers.

## Step 5

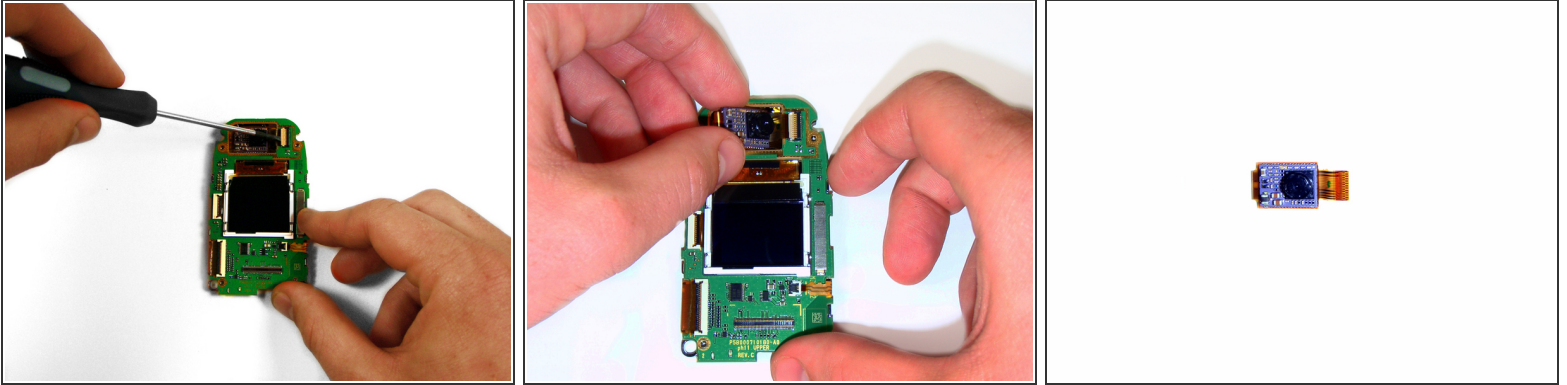

- Using the head of a flathead screwdriver, flip the white segment of the socket that the camera's ribbon-wire runs into so that it is orientated vertically.
- Gently lift the camera from its cavity and pull it away from the socket using your thumb and forefinger.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-15 02:34:32 PM.